



TAPA BFR 60x65

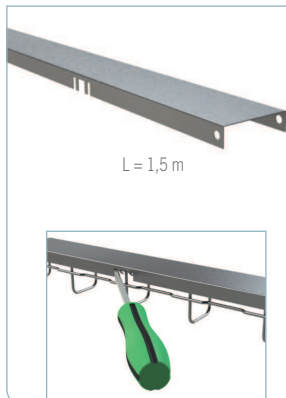


L = 1,5 m

DESCRIPCION	B mm	GS		GC	
		REF.	kg/m	REF.	kg/m
TAPA E-BFR 60	60	2/6044	0,55	2/3614	0,63

Para montar la tapa **no es necesario ningún accesorio**. Se fija presionando las pestañas laterales.

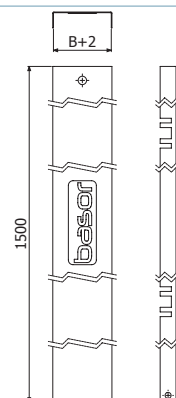

TAPA ERE PARA CHAROLAS BASORFIL

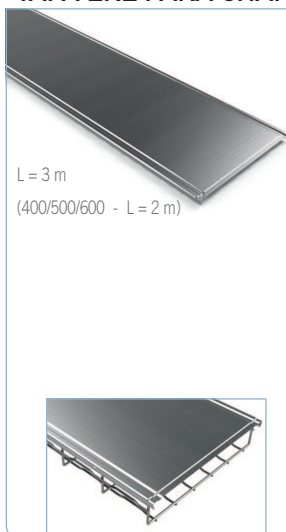

L = 3 m
(400/500/600 - L = 2 m)


DESCRIPCION	B mm	GS		GC		I304L	
		REF.	kg/m	REF.	kg/m	REF.	kg/m
TAPA ERE 100	100	2/1312	0,55	2/1321	0,82	2/4560	0,55
TAPA ERE 150	150	2/1313	0,76	2/1322	1,14	2/5123	0,76
TAPA ERE 200	200	2/1314	0,98	2/1323	1,46	2/4561	0,98
TAPA ERE 300	300	2/1316	1,55	2/1325	2,11	2/4716	1,55
TAPA ERE 400	400	2/1317	2,19	2/1326	2,75	-	-
TAPA ERE 500	500	2/1318	3,11	2/1327	3,85	-	-
TAPA ERE 600	600	2/1319	3,95	2/1328	4,58	-	-

Como tapa en las charolas BFR y BF2R H65 se emplean las de la familia ERE.

Para montar la tapa **no es necesario ningún accesorio**. Se fija por presión.



Productos con certificación UL

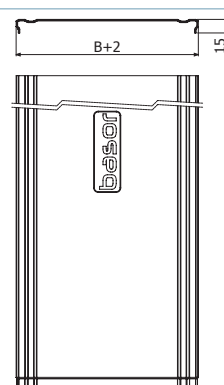

TAPA E-BFR




L = 1,5 m


DESCRIPCION	B mm	GS		GC	
		REF.	kg/m	REF.	kg/m
TAPA E-BFR 100	100	2/8811	1,81	2/8818	2,12
TAPA E-BFR 150	150	2/8812	1,09	2/8819	1,28
TAPA E-BFR 200	200	2/8813	1,37	2/8820	1,61
TAPA E-BFR 300	300	2/8814	2,21	2/8821	2,57
TAPA E-BFR 400	400	2/8815	2,85	2/8822	3,31
TAPA E-BFR 500	500	2/8816	4,36	2/8823	4,98
TAPA E-BFR 600	600	2/8817	5,16	2/8824	5,89

Esta tapa se utiliza para las charolas BF2R H105.

Para montar la tapa **no es necesario ningún accesorio**. Se fija presionando las pestañas laterales.

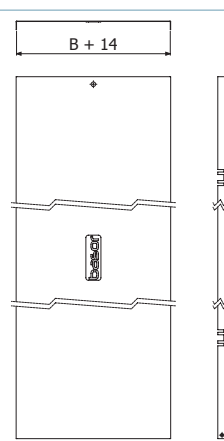

PTBFR



DESCRIPCION	e mm	GS		i304	
		REF.	kg/m	REF.	kg/m
PTBFR	1,5	2/10253	0,04	2/10254	0,04

Para montar la tapa **no es necesario ningún accesorio**. Se fija por presión.

