


歐式管形端子 Cord End Terminals

www.cnhowder.com



Vinyl-Insulated Cord End Terminals

- Maximum electrical rating: 75°C, 600V
- Insulation: Vinyl
- Terminal Body: Copper
- Plating: Tin

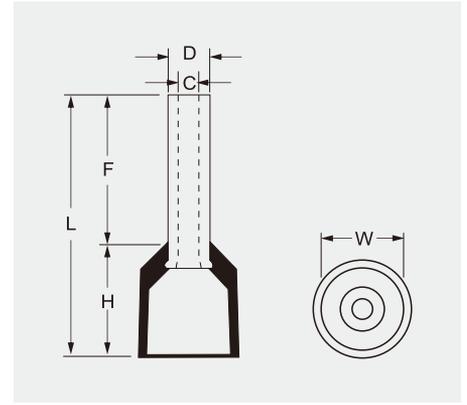


F

ITEM NO.	DIMENSION mm						PCS/ PACK	STANDARD COLOR	SELECTED COLOR
	F	L	W	H	D	C			
E0506	6.0	12.0	2.6	6.0	1.3	1.0	1000	Orange White	<ul style="list-style-type: none"> ● R ● B ● Y ● BK ● G ● GY ○ W ● O
E0508	8.0	14.0							
E0510	10.0	16.0							
E0512	12.0	18.0							
E7506	6.0	12.3	2.8	6.3	1.5	1.2	1000	White Blue	
E7508	8.0	14.3							
E7510	10.0	16.3							
E7512	12.0	18.3							
E7518	18.0	24.3	3.0	6.3	1.7	1.4	1000	Yellow Red	
E1006	6.0	12.3							
E1008	8.0	14.6							
E1010	10.0	16.3							
E1012	12.0	18.3	3.0	6.3	2.0	1.7	1000	Red Black	
E1018	18.0	24.3							
E1508	8.0	14.3							
E1510	10.0	16.36							
E1512	12.0	18.3	3.5	6.3	2.6	2.3	1000	Blue Gray	
E1518	18.0	24.3							
E2508	8.0	15.4							
E2510	10.0	17.4							
E2512	12.0	19.4	4.0	7.4	3.2	2.8	1000	Gray Orange	
E2518	18.0	25.4							
E4009	9.0	16.4							
E4010	10.0	17.4							
E4012	12.0	19.4	4.5	7.4	3.2	2.8	1000	Gray Orange	
E4018	18.0	25.4							

Vinyl-Insulated Cord End Terminals

- Maximum electrical rating: 75°C, 600V
- Insulation: Vinyl
- Terminal Body: Copper
- Plating: Tin

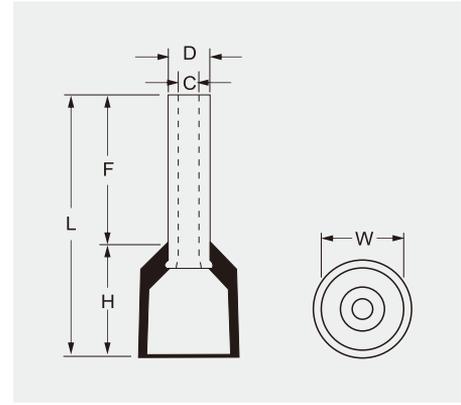

ITEM NO .	DIMENSION mm						PCS/ PACK	STANDARD COLOR	SELECTED COLOR
	F	L	W	H	D	C			
E6012	12.0	20.5	6.0	8.5	3.9	3.5	1000	Black Green	<ul style="list-style-type: none"> ● R ● B ● Y ● BK ● G ● GY ○ W ● O
E6018	18.0	26.5							
E10-12	12.0	20.8	7.5	8.8	4.9	4.5	500	Milk Brown	
E10-18	18.0	26.8							
E16-12	12.0	22.0	8.7	10.0	6.2	5.8	500	Green Milk	
E16-18	18.0	28.0							
E25-12	12.0	24.0	11.0	12.0	7.9	7.5	250	Brown Black	
E25-16	16.0	28.0							
E25-18	18.0	30.0							
E25-22	22.0	34.0							
E35-16	16.0	30.0	12.5	14.0	8.7	8.3	250	Gray	
E35-18	18.0	32.0							
E35-22	22.0	36.0							
E35-25	25.0	39.0							
E50-12	12.0	28.0	15.0	16.0	10.9	10.3	250	Olive	
E50-20	20.0	36.0							
E50-25	25.0	41.0							
E70-20	20.0	37.0	16.0	17.0	14.3	13.5	100		
E70-25	25.0	42.0							
E95-25	25.0	44.0	18.5	19.0	15.6	14.8	100		

F