


**Metal Cable Gland PG Type**  
**Metal Cable Gland M/M-length**

- Material: brass nickle-plated
- Fixrue pack:nylon plastic
- Hermetic seal: nitrile rubber
- O-seal cirde:nitrile rubber
- Protection degree:IP68-10 pressure(rotate position)
- Ambient temperature;-40°C to 100°C short time to 120°C

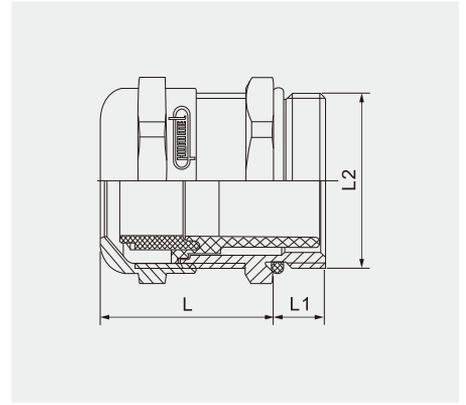


ITEM NO .	$\varnothing$ mm	L1 mm	L2 mm	L mm	$\varnothing$ mm
PG7 M12×1.5	3-6.5	5	10	19	14
PG9 M16×1.5	4-8	6	10	20	17
PG11 M18×1.5	5-10	6	10	21	20
PG13.5 M20×1.5	6-12	6.5	10	22	22
PG16 M22×1.5	10-14	6.5	10	23	24
PG21 M25×1.5	13-18	7	12	25	30
PG29 M32×1.5	18-25	8	12	29	40
PG36 M40×1.5	22-32	8	15	35	50
PG42 M50×1.5	32-38	9	15	37	57
PG48 M63×1.5	37-44	10	15	38	64

H

**Metal Cable Gland NPT Type**

**NPT Metal Cable Gland**

- Material: brass nickle-plated
- Fixrue pack:nylon plastic
- Hermetic seal: nitrile rubber
- O-seal cirde:nitrile rubber
- Protection degree:IP68-10 pressure(rotate position)
- Ambient temperature;-40°C to 100°C short time to 120°C
- Other screw thread specification (PF、BSP、PS、NPT)  
Please inquiring

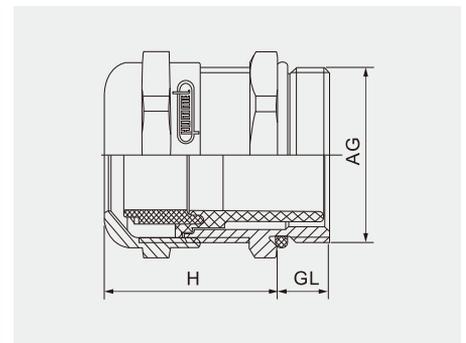

ITEM NO .	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	AG
3/8"NPT	4-8	15	20	17/19	17
1/2"NPT	6-12	13	22	22/24	21.2
3/4"NPT	13-18	13	25	30/33	26.2
1"NPT	18-25	19	29	40/41	33.3
1-1/4" NPT	18-25	18	29	40/50	42