


Vinyl-Fully Insulated Female Quick Disconnects

- Maximum electrical rating: 75°C, 300V
- Insulation: Vinyl
- Terminal Body: Brass
- Plating: Tin

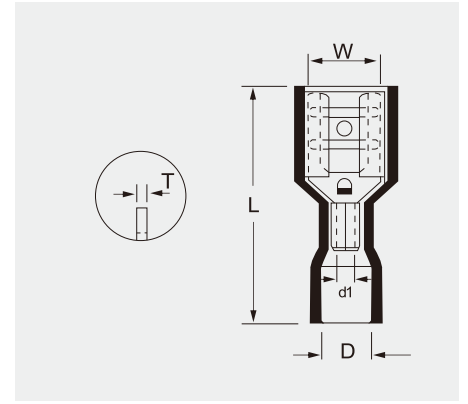

D

ITEM NO .	Nema Tab	DIMENSION mm					PCS/ PACK	COLOR	EXPLANATION					
		W	L	d1	D	T								
DFD1.25-110(5)	0.5×2.8	3.8	19.0	1.7	3.7	0.3	100	● Red	Wire range : 0.5-1.5mm ² A. W. G : (22-16) Max.current=10A					
DFD1.25-110(8)	0.8×2.8					0.35								
DFD1.25-187(5)	0.5×4.75	5.8	20.0			0.4								
DFD1.25-187(8)	0.8×4.75					0.35								
DFD1.25-250	0.8×6.35	7.5	21.5			0.4								
DFD2-110(5)	0.5×2.8	3.8	19.0			2.3				4.2	0.3	100	● Blue	Wire range : 1.5-2.5mm ² A. W. G : (16-14) Max.current=15A
DFD2-110(8)	0.8×2.8										0.35			
DFD2-187(5)	0.5×4.75	5.8	20.0								0.4			
DFD2-187(8)	0.8×4.75			0.35										
DFD2-250	0.8×6.35	7.5	21.5	0.4										
DFD5.5-250	0.8×6.35	7.5	25.0	3.4	5.6		0.4	100	● Yellow		Wire range : 4-6mm ² A. W. G : (12-10) Max.current=24A			