


These laser levelers are equipped with red and green LD laser, suitable for large or bright work places. Its applications include: horizontal, vertical, cross line projection for decoration, building construction, home decoration, renovation, furniture installation, flooring, and project layout.



LM312 wall mount
LM312 is suitable for
LM573LD-II/575LD/576LD only.

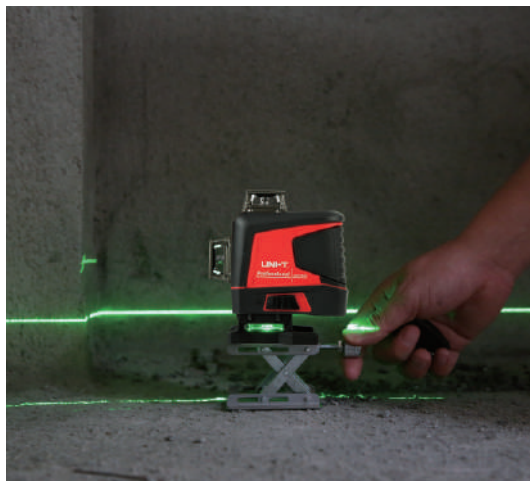

LM576LD

| Specifications | LM570R-I | LM570LD-II | LM573LD-II | LM575LD | LM576LD | LM585LD |
|---|----------------------|----------------|----------------|----------------|----------------|----------------|
| Certificates (LM570LD-II/575LD only) | CE, UKCA | | | | | |
| Laser type | Red | Osram green LD | Osram green LD | Osram green LD | Osram green LD | Osram green LD |
| Laser lines | 1V1H | 2 lines | 3D 12 lines | 3D 12 lines | 3D 16 lines | 8 lines |
| Operating distance | 15m-30m | 10m | 40m | 40m | 30m | 30m |
| Laser accuracy | ±3mm/10m | ±3mm/10m | ±3mm/10m | ±3mm/10m | ±3mm/10m | ±3mm/10m |
| Outdoor pulse mode | | | √ | √ | √ | √ |
| Remote control | | | √ | √ | √ | √ |
| Self-leveling range | 3°±1° | 3°±1° | ±3° | ±3° | ±3° | ±3° |
| Self-leveling time | ≤3s | 3s | <3s | <3s | <3s | <3s |
| Working hours | >12h (All lasers on) | 4h | >6h | >6h | >4h | >4h |
| Laser wavelength | 635nm | 520nm | 520nm | 520nm | 520nm | 520nm |
| Laser class | 2 | | | | | |

Features

| | |
|----------------------|--|
| Osram LD green laser | Self-leveling mode & manual mode |
| Outdoor pulse mode | 5200mAh Li-ion battery |
| Type-C DC-in port | includes wall mount (LM573LD-II/575LD/576LD) |

Characteristics

| | |
|------------------------------|---|
| Standard accessories | USB cable, adapter, English manual, Carrying bag (LM570R-I) |
| Power | LM570R-I: 2 x AA (LR6); LM570LD-II: 1.5V battery x 2 (LR6); LM573LD-II/LM575LD/LM576LD/LM585LD: 3.7V Li-ion battery 5200mAh |
| Product size | LM570R-I: 59 x 28 x 137mm; LM570LD-II: 85.5 x 62 x 90.3mm; LM573LD-II: 119 x 89 x 138mm; LM575LD/LM576LD: 138 x 89 x 147mm; LM585LD: 138 x 89 x 136mm |
| Product net weight | LM570R-I: 170g; LM570LD-II: 240g; LM573LD-II/LM575LD: 694g; LM576LD: 653g; LM585LD: 591g |
| Standard individual packing | Gift box, tool box, English manual (LM570R-I) |
| Standard quantity per carton | LM570R-I: 20pcs; LM570LD-II: 20pcs; LM573LD-II/LM575LD/LM576LD/LM585LD: 4pcs |
| Standard carton measurement | LM570R-I: 520 x 295 x 415mm; LM570LD-II: 420 x 320 x 350mm; LM573LD-II/LM575LD/LM576LD/LM585LD: 620 x 355 x 325mm |
| Standard carton gross weight | LM570R-I: 9.8kg; LM570LD-II: 10.71kg; LM573LD-II/LM575LD/LM576LD: 10.63kg; LM585LD: 10.22kg |

